
FRANCE

Hanger Style Transformers



HG Series

- ◆ UL 2161 Listed
- ◆ Brackets Are Provided for Easy Wall or Ceiling Installation
- ◆ 8' Ft. Three-Conductor Line Cord with 3-Prong Plug, Pull-Chain ON/OFF Switch, and 24" Long Secondary Cable
- ◆ Secondary Circuit Ground Fault Protection on 15030, 12030, 9030 and 7530


H Series

- ◆ For Export Only
- ◆ CSA Listed
- ◆ Brackets Are Provided for Easy Wall or Ceiling Installation
- ◆ 8' Ft. Three-Conductor Line Cord with 3-Prong Plug, Pull-Chain ON/OFF Switch, and 24" Long Secondary Cable




www.franceformer.com


Hanger Style Transformers

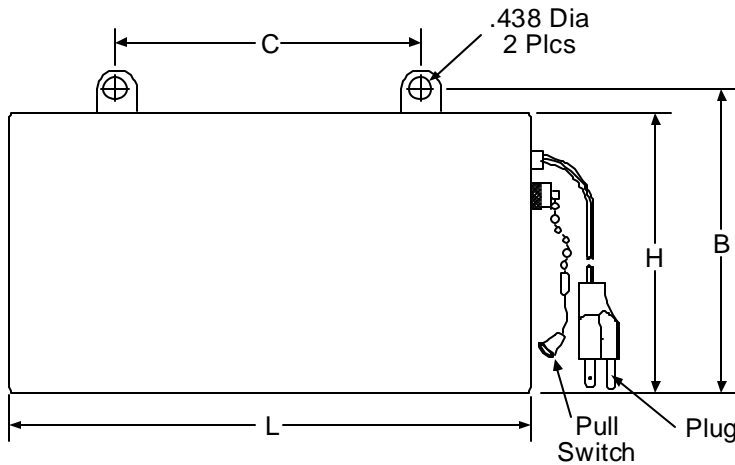

HG & H Series

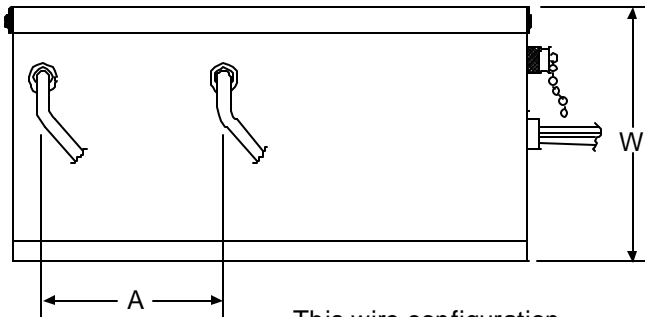

This wire configuration for the HG Units.

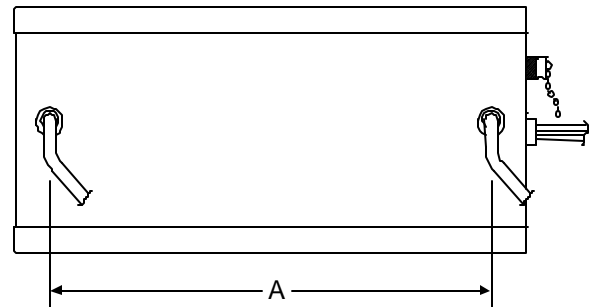

This wire configuration for the H Units.

Catalog Number	VAC	HZ	Secondary		Primary V.A.	Input Amps	Wt. lbs.	Dimensions in Inches					
			Volts	mA				L	W	H	A	B	C
❖ 15030 HG	120	60	15000	30	475	3.95	25	10.25	5.00	5.1	5.4	5.8	5.6
❖ 12030 HG	120	60	12000	30	375	3.15	22	10.25	5.00	5.1	5.4	5.8	5.6
❖ 9030 HG	120	60	9000	30	300	2.50	10	8.00	3.22	3.5	4.0	4.0	5.4
❖ 7530 HG	120	60	7500	30	250	2.10	9	8.00	3.22	3.5	4.0	4.0	5.4
* 6030 HG	120	60	6000	30	200	1.65	9	8.00	2.83	3.5	3.0	4.0	5.4
* 5030 HG	120	60	5000	30	170	1.40	9	8.00	2.83	3.5	3.0	4.0	5.4
* 4030 HG	120	60	4000	30	140	1.15	9	8.00	2.83	3.5	3.0	4.0	5.4
* 15030 H	120	60	15000	30	450	4.00	23	9.25	4.40	5.0	8.0	5.5	5.4
* 12030 H	120	60	12000	30	360	3.20	20	9.25	4.40	5.0	8.0	5.5	5.4
❖ 9030 H	120	60	9000	30	225	2.40	10	7.19	3.22	3.5	5.5	4.0	5.4
❖ 7530 H	120	60	7500	30	190	2.00	9	7.19	2.82	3.5	5.5	4.0	5.4
❖ 9020 H	120	60	9000	20	190	1.70	9	7.19	2.82	3.5	5.5	4.0	5.4
❖ 7520 H	120	60	7500	20	165	1.50	9	7.19	2.82	3.5	5.5	4.0	5.4

- * Secondary - Balanced Mid-point Ground
- ❖ Secondary - Unbalanced Mid-point Ground