

ABSKO Products

TECHNICAL DATA

800-314-6366 toll free US & Canada

G*-2

Neon Receptacle Lampholder





Lampholder over 1000v
39RK

1996 NEC 600-23(b)


Secondary Fault Protection. Exception No.2:

Transformers with integral porcelain or glass secondary housing for the neon tubing and requiring no field wiring on the secondary **shall not be required to have secondary ground-fault protection.**

Slim, Cost-effective, Simple
Complies with NEC 600-23 & UL 2161

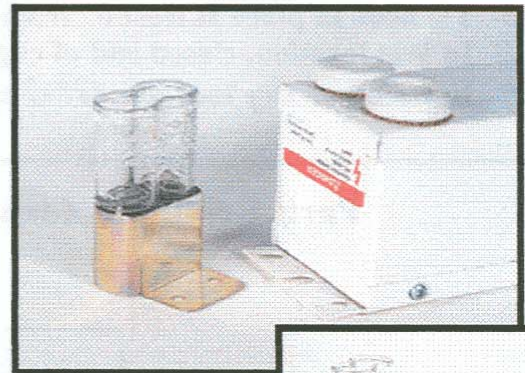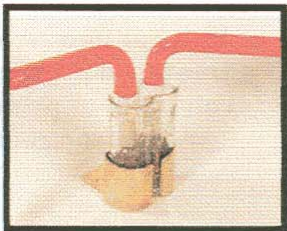

Metal base can be inverted and recessed for use with 1-3/4" tube supports for a slim, neat appearance.

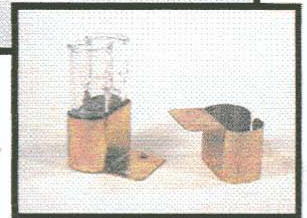

Use with SGFP-exempt PBKM transformers in self-contained letters...

Use with long tube supports

Glass

OD: 3"x1-7/8"x1"
ID: 7/8" ea cavity
C-C: 1"

Base

1-1/4" high
Extends 1"x1-1/2"
from the cup

**Borosilicate Glass
Metal Base**

**REQUIRES NO GTO WIRE-
DUAL SPRING CONNECTIONS**

**Can be used in Dry, Damp and
Wet location (same as GG*cups)**

7500 volt (15,000 volt mid-point return transformers)